
Page 1 of 2


3 1/8" Wide 1 7/16" Deep Channel, 26 1/2", 38 1/4" or 50" Lengths, 2 Lamp, T5


## **Features**

- Only 1 7/16" deep.
- Utilizes compact, high efficency, T5 or T5HO lamps.
- · Fully enclosed wiring.
- Push through rotary lock lamp holders for secure lamp retention.
- 4" lamp overlap when installed in row



## **Dimensions**





Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Volts/Ballast:	

Lightolier a Genlyte Thomas Company www.lightolier.com
Technical Information: (978) 657-7600 ● Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 ● (508) 679-8131 ● Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
Copyright 2002 Lightolier Section 3A / H120-19




# Staggered T5 Strip SS T5 Strip

Page 2 of 2

3 1/8" Wide 1 7/16" Deep Channel, 26 1/2", 38 1/4" or 50" Lengths, 2 Lamp, T5

# **Photometry**

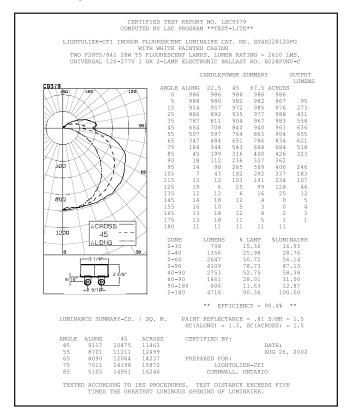


#### Model No. SS4S228120PG

			440 1	NG SCIEN PHILLIP WATERLOO	ST., UN	IT 19		
						). LSC937 *TEST-LIT		
LI	GHTOLIER	-CFI IND					o. SS4S22	8120PG
			W T5 FLUC		LAMPS.	LUMEN RA	TING = 26 T NO. B22	
			(	CANDLEPO	WER DATA	A		
	ANGLE			PLANE				OUTPUT
		ALONG	22.5	45	67.5	ACROSS	AVERAGE	LUMENS
	0	986	986	986	986	986	986 980 980 970 978 970 935 935 822 824 722 407 286 206 172 139 100 5 6 6 10 11 11	
	5	988	980	982	982	967	980	95
	10	980	972	978	986	972	978	
	15	954	957	972	985	976	970	273
	20	919	922	953	979	977	950	404
	25	886	892	935	9//	988	935	431
	30	839	854	920	968	985	913	550
	35	787	811	904	967	983	892	228
	40	721	764	8/5	957	9/6	861	63.6
	45	604	708	200	010	301	702	020
	56	507	507	764	063	904	722	655
	60	427	5/2	709	000	965	670	033
	65	3.47	484	651	786	834	628	621
	7.0	266	419	605	738	775	571	001
	75	184	344	543	648	684	492	518
	80	116	283	456	547	568	407	
	85	4.5	199	316	400	426	288	323
	90	18	112	236	327	362	216	
	95	14	98	265	369	406	236	246
	100	7	67	223	336	387	206	
	105	7	43	182	292	337	172	183
	110	17	18	140	245	293	139	
	115	13	12	103	191	234	107	107
	120	13	15	60	138	171	76	
	125	19	6	25	99	128	51	46
	130	13	5	10	48	72	26	
	135	12	12	6	16	25	13	12
	140	19	12	1	0	5	6	
	145	14	18	12	4	0	10	5
	150	11	7	10	0	0	5	
	155	16	10	5	3	0	6	4
	T 6 0	19	9	16	4	1	10	-
	100	13	18	12	8	2	11	3
	170	19	1.0	10	4	3	11	4
			18	11	5	1	10	1

# **Ordering Information**

Explanation of Catalog Number. Example: SS4S228120PG










ity: Lamp Type:
( Nominal 22" )
14 = 14W T5
24 = 24W T5 H0
( Nominal 34" )
21= 21W T5
39 = 39W T5 H0



PG = Electronic T5 Program Start, Less than 10 THD
PI = Electronic T5 Instant Start, <10 THD
(14W, 21W or 28W only, no UNV voltage)
PF = L0LT5 Power Spec Dimming (1-Lamp 54 watt only)

#### **Options & Accessories**

Radio Interference Filter: 120, 277 or UNV volt, 50 or 60 Hz. Suffix: R Ballast Options: For other ballast options, consult factory.

# **Specifications**

Materials: Chassis parts are die-formed heavy gauge cold rolled steel,1-3/8" deep x 3 1/8" channel width.

**Finish: Chassis exterior** - phosphate undercoating, baked white acrylic matte high reflectance paint finish.

#### **Specifications (continued)**

**Electrical:** Rapid start HPF, thermally protected class "P" ballast. (Bi-tube type) If K.O.s are within 3" of ballast use wire suitable for at least 90°.

Labels: Listed by

54 = 54W T5 H0



### **Job Information**

#### Type

Lightolier a Genlyte Thomas Company www.lightolier.com
Technical Information: (978) 657-7600 ● Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 ● (508) 679-8131 ● Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
Copyright 2002 Lightolier Section 3A / H120-19